


# Thin Film ceramic Filter

## BMBP22R8/R8-6PA

### Precautions

1. The chip is recommended sub-cavity use, both sides of the side wall from about 0.2mm, surface distance Cover about 3mm, the chip ports are interchangeable;
2. Chip recommended low-stress conductive adhesive (such as ME8456) bonding;
3. Chip should be installed in Kovar (recommended) or molybdenum copper with ceramic thermal expansion coefficient(6.7ppm / °C) on the carrier, the carrier thickness  $\geq 0.2\text{mm}$ ;
- 4 circuit board micro-chip wire bonding connection, it is recommended microstrip bonding at mining T-type structure to match, T-size as right

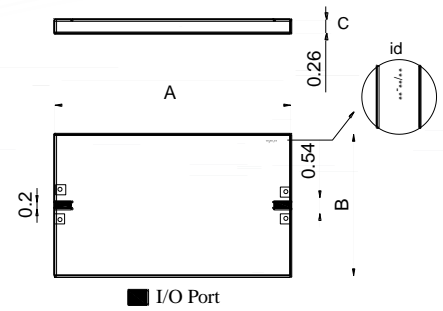

Circuit board Rogers 5880 , 10mil	Circuit board Rogers 4350, 10mi I
frequency: DC-38GHz	frequency: DC-32GHz
注: T型图形顶端基板白边 50um; 频率 10GHz 以下无需匹配	

### Features

- high-precision film processing technology
- high performance, low temperature drift, high power
- Ceramic substrate, 50Ω coplanar waveguide output
- Gold wire bonding, suitable for multi-chip integrated module applications

### Environmental parameters

Working temperature	-55°C~+85°C
storage temperature	-55°C~+125°C
Maximum input power	35dBm

### Electrical Specifications

Center frequency( $f_0$ )	22.8
Passband frequency range (GHz)	22.5-23.1
Band fluctuations (dB)	1
Center insertion loss (dB)	3.5
Return loss (dB)	15
Band attenuation (dB)	$\geq 40@21.8\text{GHz}$ $\geq 40@24.0\text{GHz}$

Passband loss VS frequency ( $T_A=25^\circ\text{C}$ )

